

DE433B/BA


Rolling Code radio receivers, 433.92MHz,
four channels



The 4 channels radio receivers of series DE433B/BA are the result of an high microprocessor technology and from the experience of PROGET in the field of Radio frequency. They use the codify B&B Rolling Code and can memorize up to 80 different transmitters. Are available in the versions with a mini-antenna installed on the Box (DE433-BA) or without antenna (DE433/B). They're provided in an elegant box for external installation. The receivers DE433B/BA can permit to do a back-up of the memory by an optional module that allows, in case of damages in the receiver, to quick replace it without needing to record again all the radiocontrols.



DE433B/BA

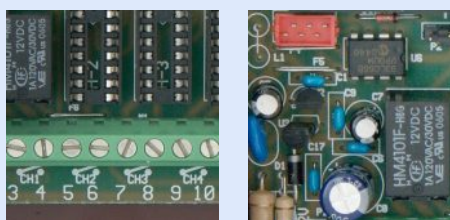

Main characteristics

- Up to 80 B&B Rolling Code transmitters
- 1 channel expandable to 4 with the add of proper relays
- Elegant Box for external installation with mini-antenna installed (DE433/BA)
- Remote programming by "Master" radiocontrol
- Optional memory module for data back-up
- Setup of the relays functionalities (Step/Step, impulsive) by "Master"

Versions

DE433-B	1 channel Rolling Code receiver expandable to 4, in Box.
DE433-BA	1 channel Rolling Code receiver expandable to 4, in Box with mini-antenna installed.

Compatibles Radiocontroles

BUGGY - F, FX
BUGGY - C, CX
BUGGY - L, LX
BUGGY - IR, IRX
BUGGY - P, PX
BUGGY - PASS, PASSX

EMY - 2F, 4F
EMY - 2C
EMY - 2P, 2PT, 2PIR
EMY - 2IR
EMY - 2XTR, 2XIRT

ETY - 2F, 4F
ETY - 2B, 4B

Technical characteristics

Frequency	Feeding	Absorbed current	Memory capacity	Sensibility	Antenna impedance	Compliance to norms
433.92MHz	12/24Vac/Vdc +/- 15%	36mA stand-by 80mA max	80 codici	<0,7uV 10dB S/N	50Ohm	EN89336/CEE / EN300-220

