

DECOB/BA


Radio receiver at self-learning of fixed codes
30.875MHz , four channels



The 4 channels radio receivers of series DECOB/BA are the result of an high microprocessor technology and from the experience of PROGET in the field of Radio frequency. They're receivers at self-learning of dipswitch codes and are available in the versions with a mini-antenna installed on the box (DECO-BA) or without antenna (DECO/B). They're provided in an elegant box for external installation. Those receivers works with radiocontrols of the series QTE.



DECOB/BA

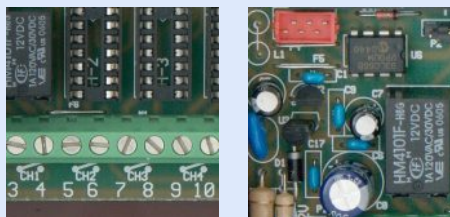

Main characteristics

- Self-learning of fix codes
- 1 channel expandable to 4 with the add of proper relays
- Frequency 30.875
- Elegant Box for external installation with mini-antenna installed (DECOB/BA)

Versions

DECO-B	1 channel receiver expandable to 4, in Box.
DECO-BA	1 channel receiver expandable to 4, in Box with mini-antenna installed.

Compatibles Remote-controls

QTE - 1A
QTE - 2A
QTE - 4A

Technical characteristics

Frequency	Feeding	Absorbed current	Sensibility	Antenna impedance	Compliance to norms
30.875MHz	12/24Vac/Vdc +/- 15%	36mA stand-by 80mA max	<0,7uV 10dB S/N	50Ohm	EN89336/CEE / EN300-220

